


AROMA-GUARD II INSTALLATION INSTRUCTIONS

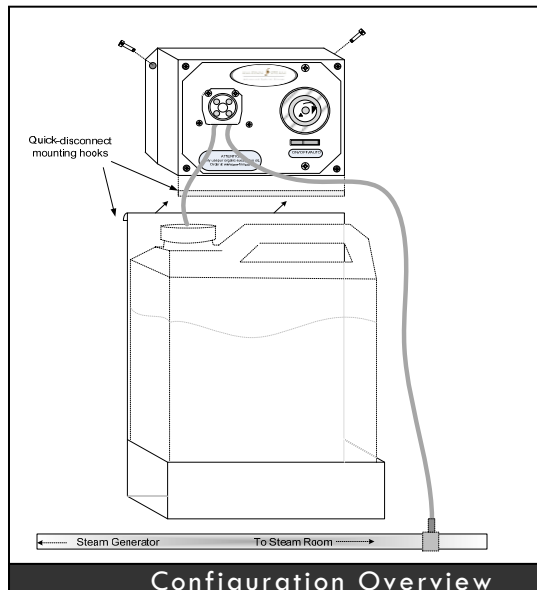

PLUMBING

- Mount the Aroma-Guard II to the wall with the reservoir mounted directly below.
- Connect delivery hose to the copper steam line using the provided saddle-valve.
- Insert the intake hose into the oil reservoir.

WARNING: Use only with nonflammable liquids. Only use 100% natural and organic essential oils. Do not use oils containing alcohol, chemicals and other additives not approved by the FDA.

PROGRAMMING

The timer dial contains 72 “trippers” which, when set at the inner perimeter of the dial, will turn the switch “ON” at the time adjacent to the tripper. The switch will return to the “OFF” position when the timer progresses past the inward trippers.

The 72 trippers allow multiple on/off sequences with a minimum on or off time of 20 min. To program, set all trippers inward for the duration of the on event.

For example, to turn the Aroma-Guard on at 5:00pm and off at 11:00pm, leave inward the 18 trippers between 5 and 11 on the “pm” side of the dial. Make sure manual switch is in the “AUTO” position.

NOTE: For any times where “OFF” programming is desired, the trippers must be moved to the outer perimeter of the dial.

SETTING THE TIME

Rotate the dial *clockwise* until the correct time and “am” or “pm” is opposite the arrow on the plate.

CAUTION: Do not turn dial counter-clockwise, as the timer will be damaged



Certified Products



Government Approved



Preferred Vendor



Exclusive Preferred Vendor



Preferred Vendor



Preferred Vendor