


The Scandia POWERZONE O3 Generator is to be placed outside of the steam room. The generator must be positioned in a location where it can be accessed In order to activate by maintenance and cleaning staff (NOT BY MEMBERS OR GUESTS). Common locations are utility/service rooms or above the modular steam room. The generator is to be activated manually by cleaning or maintenance staff on a daily basis.

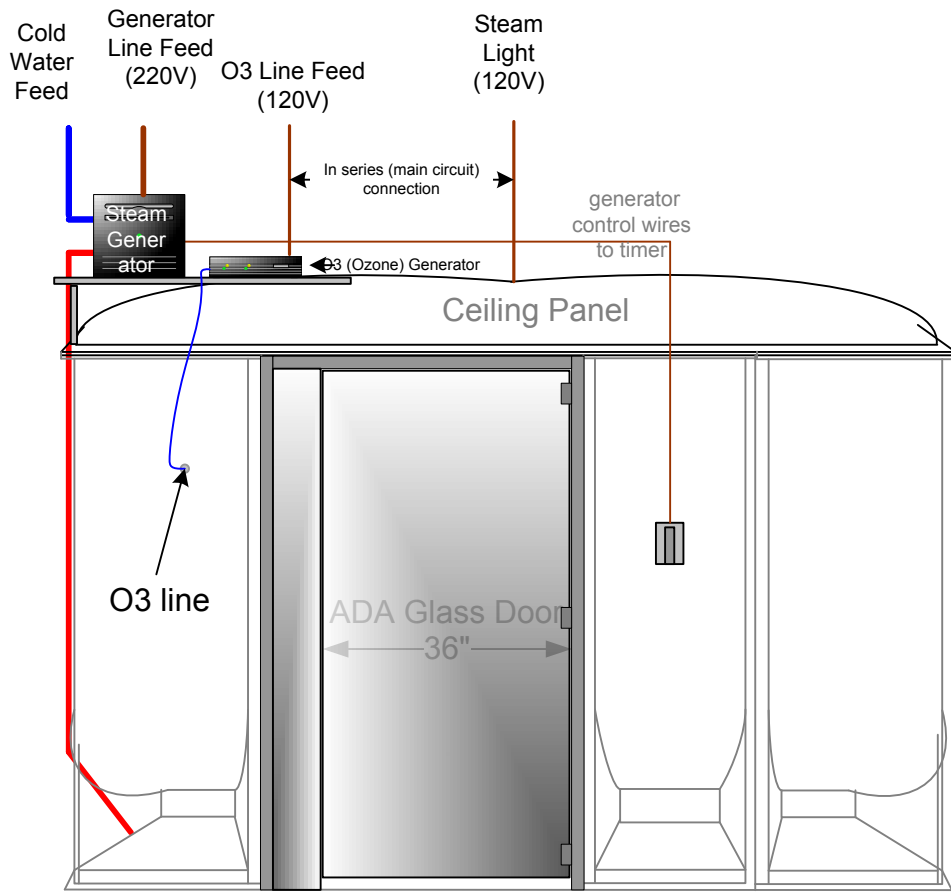

The POWERZONE O3 GENERATOR SHOULD ONLY BE ACTIVATED WHEN THE STEAM/SAUNA ROOM IS UNOCCUPIED. Activate the POWERZONE ONLY during a time when the STEAM/SAUNA room is closed to customers. At least thirty (30) minutes should laps before bathers return to the Steam/Sauna room. The timer should be checked weekly to ensure the appropriate time is set. Re-set the timer in the event of a power outage or any possible disruption of the power or possible alteration of the set on-time.

Room Size cu ft	Time setting minutes
200	10
250	15
300	20
350	25
400+	30

To activate the Powerzone generator press the O3 button to turn on the unit. Press the Up or Down button to set time. Refer to the chart below to determine appropriate time.

